

OUTDOOR SULFUR AERATOR SYSTEM

[SEE INDOOR MODEL AERATOR [CLICK HERE](#)]



All Rights Reserved.

Water Refining Company (since 1981)
Height | Diameter | Inlet/Outlet | Tank
5 ft. | 30.5 Inch | Full 1 Inch | 170 Gal

All rights reserved.
www.WaterEfining.com

Technical Support
1-800-722-3212 (until 10 pm EST)

No Chlorine
No Carbon Filters
No Cartridges
No Backwashing
No Monthly Servicing

HELP LINE 1-800-722-3212

Outdoor Sulfur Aerator Model 20MY2AS (non-freezing weather)

The Aeration Technology eliminates up to 99.9% of Heavy Sulfur, Rotten Egg Smell, Black Stains and Corrosive Action in well water. The Aeration Process (mixing of air and water) is the most effective Technology for removing Sulfur Gas from well water. Aeration is a very natural process and environmentally green technology.

\$ 4,100.00 Average Retail Pricing Level Nationwide
~~\$(2,215.00)~~ (Internet Web Discount)
\$ 1,885.00
0.00 Now Free Freight and Crating Florida
\$ 1,885.00 Contractor Pricing to All End Users

Now Free Freight and Crating Florida~Next Day Shipping
[Pricing subject to change without notice.]

BUY NOW...



*** Please Call Phone-In Orders
1-800-722-3212 (until 10 pm EST)
Thank you.




A+ Rating

Sulfur Aeration Technology No chlorine. Well water enters the Aerator Tank from your existing well pump and pressure tank. The Aeration manifold scrubs, oxidizes, and aerates (mixing of air and water), and the Sulfur Gas is vented outside to the atmosphere.


Also, installed vertically inside the Aerator Tank is a submersible pump needed to re-pressurize the water supplying the home or building. A companion pressure tank is included for the Aerator submersible pump. The System is fully automatic with refilling and shutoff controls.

OUTDOOR SULFUR AERATOR SYSTEM

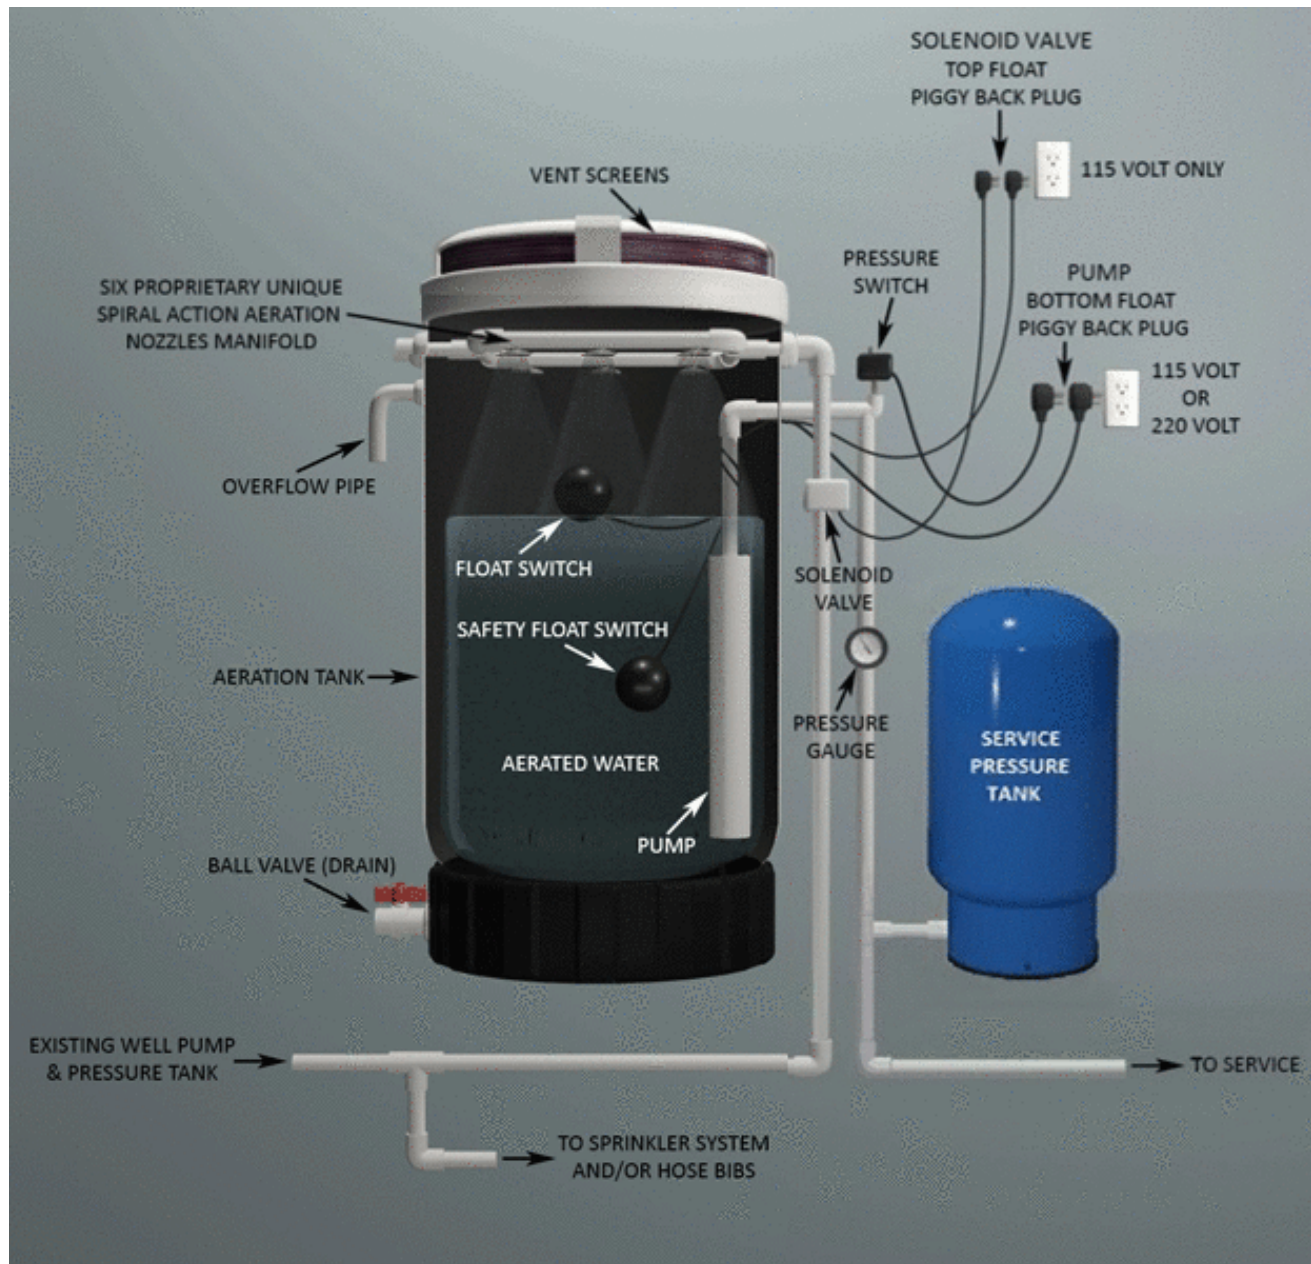

- Environmentally Green Technology
- No Chlorine
- FDA Approved
- (Food & Drug Administration)
- Polyethylene Customized Blow Molded Tank
- Fully Automatic
- Twist Top Accessibility
- ½ H.P. Submersible Pump, 115-V or 220-V,
- Model: Franklin Electric 20XC1-05P4-2W115, 20 GPM, 60 psi
- Bladder Pressure Tank 22 Gal. Flexcon PC66FR
- Automatic Refilling and Shut Off Controls
- Completely Assembled and Wired for Installation
- 5 Year Limited Warranty on Aerator Tank
- Installation Instructions Included

OUTDOOR SULFUR AERATOR SYSTEM

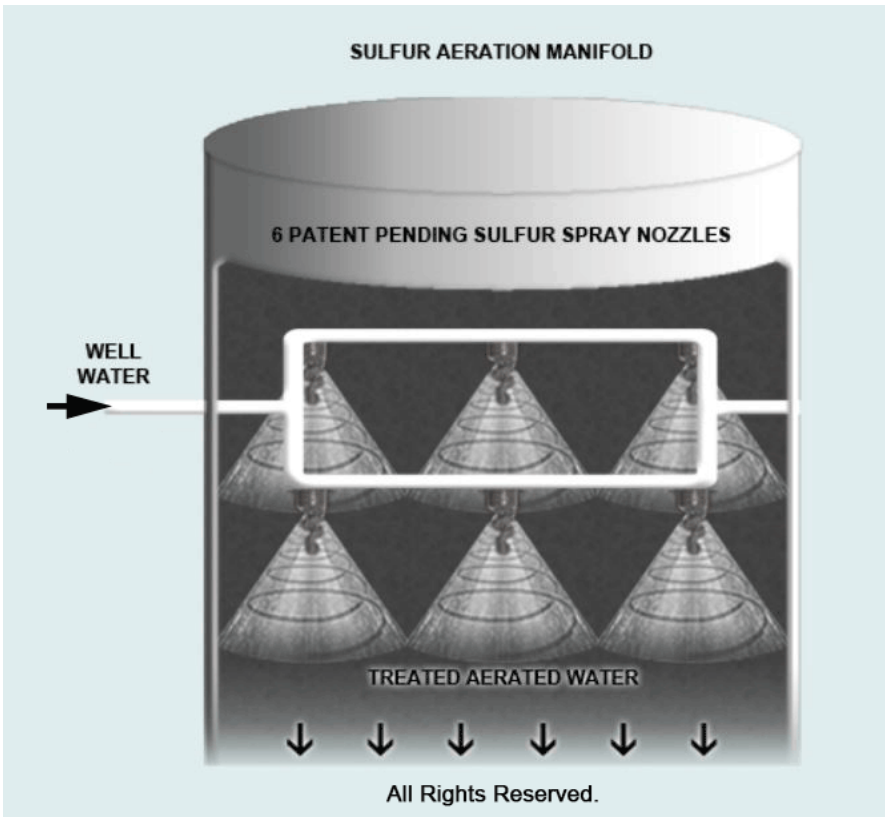

Rectangular Aeration Spray Manifold consisting of six (6) patent pending sulfur aeration nozzles.



Each aeration nozzle produces a spiral double cone of spray, a spiral inner cone of spray within a spiral outer cone of spray. This patent pending spray action doubles the aeration process.


Other customers have ordered....

Optional Ozone Bubbler w/ Air Stone Model #JED
203 – 115v \$324.00
Ozone Destroys Bacteria, Viruses, Parasites,
Plus Other Microbial Contaminants
[click here for more information on Ozone
Bubbler] Add to Cart

Optional Sediment, Sand & Turbidity Filter Model
PFT100 \$114.70
No cartridges needed...has Clean-out Valve
[click here for more information on Sediment
Filter] Add to Cart

*Larger Aeration Systems Available upon request.
350 Gal 500 Gal 1100 Gal
2,500 Gal 5,000 Gal

*** Please Call Phone-In Orders
1-800-722-3212 (until 10 pm EST)
Thank you.



All rights reserved.
www.WaterEfining.com

Technical Support
1-800-722-3212 (until 10 pm EST)