

### **OUTDOOR SULFUR AERATOR SYSTEM**

[NOTE...FOR THE INDOOR MODEL AERO1I-SUL FREEZING WEATHER CONDITIONS NORTHERN STATES CLICK HERE]

The Aeration Technology eliminates up to 99.9% of Heavy Sulfur, Rotten Egg Smell, Black Stains and Corrosive Action in well water. The Aeration Process (mixing of air and water) is the most effective Technology for removing Sulfur Gas from well water. Aeration is a very natural process and environmentally green technology.

Outdoor Sulfur Aerator Model 20MY2AS

(non-freezing weather)



Outdoor Sulfur Aerator System Model 20MY2AS

Water Refining Company (since 1981)
Height | Diameter | Inlet/Outlet | Tank
5 ft. | 30.5 Inch | Full 1 Inch | 170 Gal

All rights reserved. www.WaterEfining.com

Technical Support 1-800-722-3212 (until 10 pm EST)

No Chlorine
No Carbon Filters
No Cartridges
No Backwashing
No Monthly Servicing

HELP LINE 1-800-722-3212

#### **Special Contractor Discount for Do-It-Yourself Homeowners**

Now Free Freight and Crating Florida~Next Day Shipping [Pricing subject to change without notice.]

**BUY NOW...** 





\*\*\* Please Call Phone-In Orders 1-800-722-3212 (until 10 pm EST) Thank you.




A+ Rating

Sulfur Aeration Technology. No chlorine. Well water enters the Aerator Tank from your existing well pump and pressure tank. The Aeration manifold scrubs, oxidizes, and aerates (mixing of air and water), and the Sulfur Gas is vented outside to the atmosphere.


Also, installed vertically inside the Aerator Tank is a submersible pump needed to re-pressurize the water supplying the home or building. A companion pressure tank is included for the Aerator submersible pump. The System is fully automatic with refilling and shutoff controls.

# **OUTDOOR SULFUR AERATOR SYSTEM**

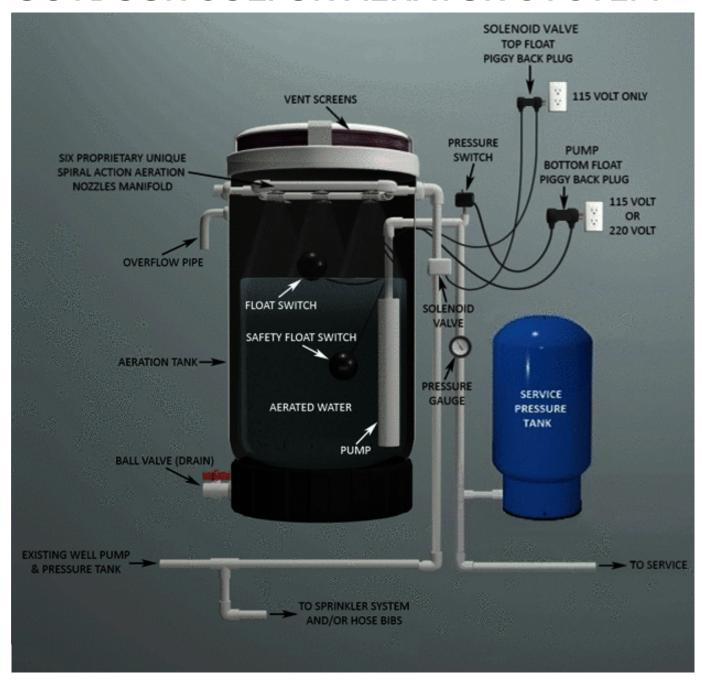

- Environmentally Green Technology
- No Chlorine
- FDA Approved
- (Food & Drug Administration)
- Polyethylene Customized Blow Molded Tank
- Fully Automatic
- Twist Top Accessibility
- ½ H.P. Submersible Pump, 115-V or 230-V optional
- Model: Pearl Bottom Draw Pump, 20 GPM, 60 psi
- Bladder Pressure Tank 22 Gal. Flexcon PC66FR
- Exhaust Blower System 3"
- Automatic Refilling and Shut Off Controls
- Completely Assembled and Wired for Installation
- 5 Year Limited Warranty on Aerator Tank
- Installation Instructions Included

## **OUTDOOR SULFUR AERATOR SYSTEM**

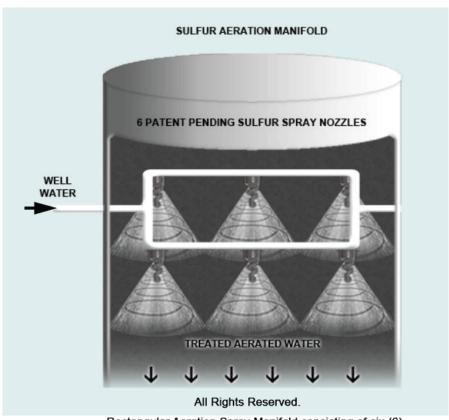

Rectangular Aeration Spray Manifold consisting of six (6) patent pending sulfur aeration nozzles.



DOUBLE SPIRAL SPRAY All Rights Reserved.

Each aeration nozzle produces a spiral double cone of spray, a spiral inner cone of spray within a spiral outer cone of spray. This patent pending spray action doubles the aeration process.

#### Other customers have ordered....

Optional: <u>Sediment, Sand and Turbidity Filter</u> (Click Here) No cartridges needed...has clean-out purge valve.

On a through housing the control of the control of

See through housing. \$147.57 Add to Cart


Optional: Ozone Generator Bubbler (Click Here)

Purifies - Disinfects - Sterilizes

Three Models:

Model JED 203 Residential \$384.00 Add to Cart Model JED 203 Residential with Timer \$457.00 Add to Cart

\*\*\* Please Call Phone-In Orders 1-800-722-3212 (until 10 pm EST) Thank you.



All rights reserved. www.WaterEfining.com

Technical Support 1-800-722-3212 (until 10 pm EST)

\*Larger Aeration Systems Available upon request.
350 Gal 500 Gal 1100 Gal
2,500 Gal 5,000 Gal