

Radon Aerator System

SALE!



All Rights Reserved

Water Refining Company (since 1981)

Height	Diameter	Inlet/Outlet
6 ft.	30.5 Inch	Full 1 Inch
Blower	Tank	
75 Cu. Ft. Per Min.	170 Gal.	



A+ Rating

***** Telephone Orders Please Call
1-800-722-3212 (until 10 pm EST)
Thank you.**

MODEL AER01I-RAD-BUB

Combined two technologies in one system providing 24/7 around-the-clock Radon removal. The primary technology is the six (6) nozzle aerating manifold with patent pending radon nozzles. Each nozzle provides a double cone of spray, a spiral inner cone of spray within a spiral outer cone of spray, doubling the aeration process.

The Secondary Technology is the Forced Air Compressor Bubbler which sends a 4" column of air bubbles up the center of the aerator tank. This steady stream of air bubbles provides 24/7 around-the-clock removal of radon.

SALE

Special Contractor Discount for Do-It-Yourself Homeowners

~~\$ 7,989.00~~ Average Nationwide Dealership Retail Price

\$(4,166.00) (Discount Do-It-Yourself Homeowners)

00.00 Now Free Freight & Crating USA

\$ 3,823.00 Your Cost

Add to Cart



Water Refining Company Inc.

A+ Better Business Bureau

The Most Trusted Name for Aerator Systems



FREE SHIPPING

***Larger Aeration Systems Available upon request.**

350 Gal 500 Gal 1100 Gal

2,500 Gal 5,000 Gal

Free Gift! Order now and receive a complimentary Water Cop "Shut-Off" automatic Shut-down Safety Switch with Audio Alarm - a \$383.00 value! Limited Supply Available.


Other Customers Have Ordered:

Optional Sediment, Sand & Turbidity Filter pft100


No cartridges needed...has Clean-out Purge Valve, See Through Housing.

[\[More Information\]](#)

\$147.57 [Add to Cart](#)

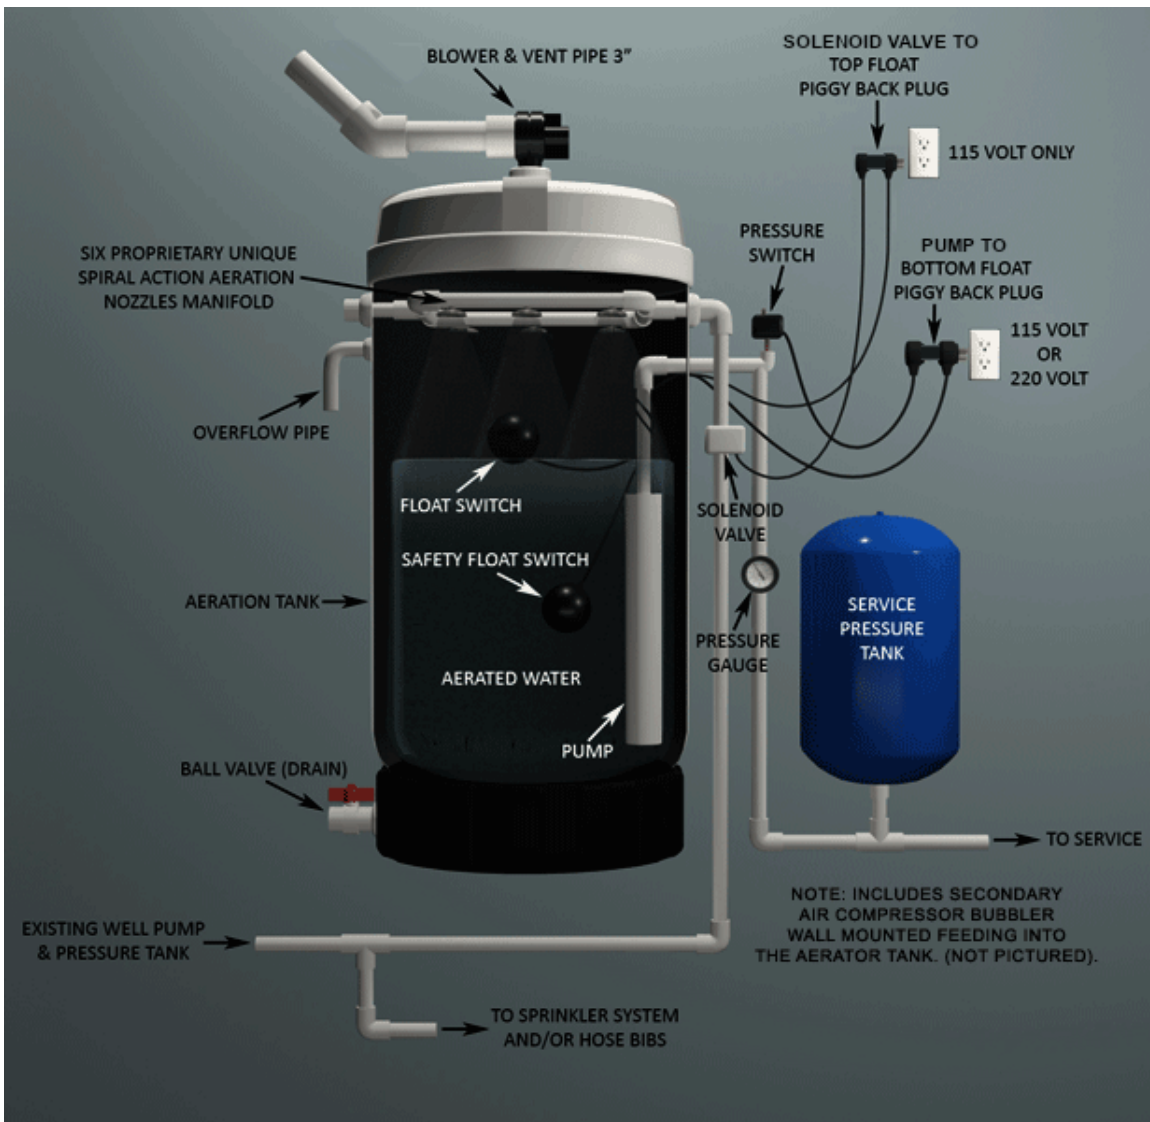

Advanced Aeration Solution




Water Refining Company


**Technical Support 1-800-722-3212
(Until 10 pm ET)**

- Environmentally Green Technology
- Chemical Free
- FDA Approved (Food & Drug Administration)
- Polyethylene Customized Blow Molded Tank
- Fully Automatic
- Twist Top Accessibility
- 1/2 H.P. Submersible Pump, 115-V or 220-V,
- Bladder Pressure Tank 22 Gal. Flexcon PC66FR
- Exhaust Blower System
- Automatic Refilling and Shut Off Controls Completely
- Assembled and Wired for Installation
- 5 Year Limited Warranty on Aerator Tank
- Installation Instructions Included

Unique Nozzle Technology

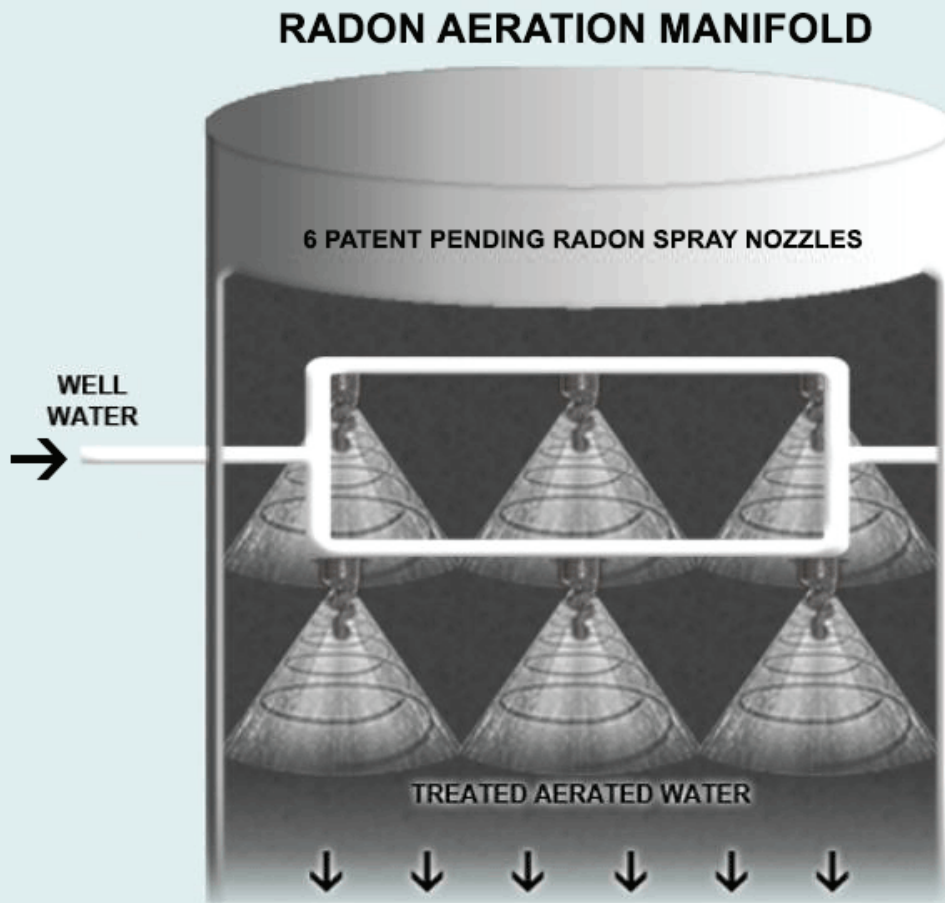

Rectangular Aeration Spray Manifold consisting of six (6) patent pending radon aeration nozzles.

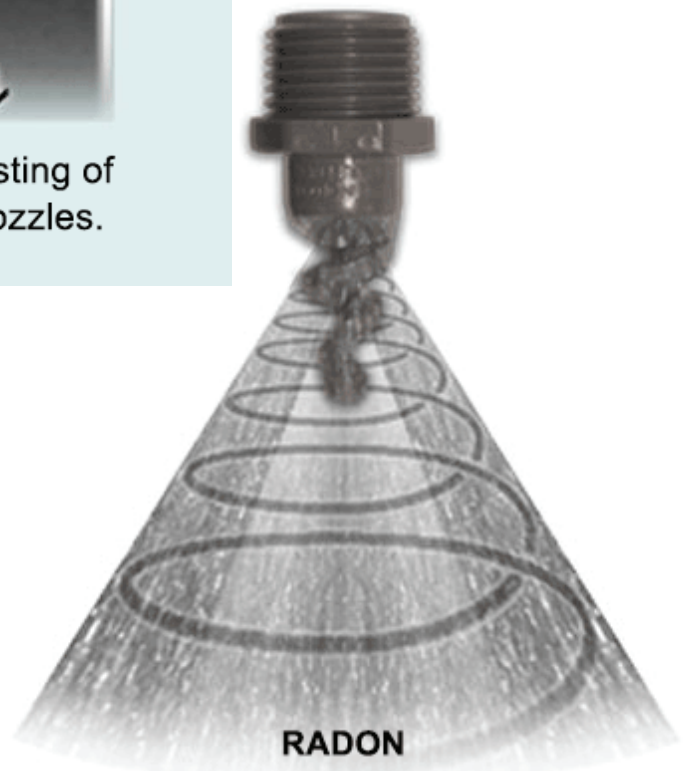

ALL RIGHTS RESERVED

Each aeration nozzle produces a spiral double cone of spray, a spiral inner cone of spray within a spiral outer cone of spray. This patent pending spray action doubles the aeration process.

How Does it Work?

Well water enters the Aerator Tank after your existing well pump and pressure tank. The six nozzle Aeration manifold scrubs, oxidizes, and aerates (mixing of air and water), and the Radon Gas is blown out via the Exhaust Blower System through a 3" PVC or similar pipe, and vented outside the home. The Radon Gas escapes into the atmosphere.

Also, installed vertically inside the Aerator Tank is a submersible pump needed to re-pressurize the water supplying the home or building. A companion pressure tank is included for the Aerator submersible pump. The System is fully automatic with automatic refilling and shutoff controls.

The System is completely assembled and pre-wired for easy installation with installation instructions included. Usually installed by a do-it-yourself homeowner or handyman or plumber in approximately 6 -7 hours. Technical support by phone is available if needed at 1-800-722-3212.

