

Methane Aerator System



Height Diameter 6 ft. 30.5 Inch

Inlet/Outlet Full 1 Inch

Blower 75 Cu. Ft. Per Min.

Tank 170 Gal.

*** Telephone Orders and **Technical Support, Please Call** 1-800-722-3212 (until 10 pm EST) Thank you.

MODEL AER01I-METH

[Installation is indoors due to Freezing Weather Conditions] Our Aeration Technology is Scientifically Engineered and Designed for the Removal of up to 99.9% of Methane Gas (CH4) from Well Water.

The Aeration Process (mixing of air and water) is the most effective technology for removing Methane Gas from well water. Aeration is a very natural process and environmentally green technology.

SALE

Special Contractor Discount for Do-It-Yourself Homeowners \$ 7,250.00 Average Nationwide Dealership Retail Price \$(3,675.00) (Discount Do-It-Yourself Homeowners)

0.00 Now Free Freight & Crating USA \$ 3,575.00 Total Cost



Shipping to Canada is easy! Call Toll Free 1-800-722-3212

Free Gift...

Order Now and receive a complimentary "Water Cop" Shut-Off Automatic Shut-down Safety Switch with Audio Alarm (\$383.00 Value) Limited Supply Available!










A+ Rating

FREE SHIPPING


*Larger Aeration Systems Available upon request. 350 Gal 500 Gal 1100 Gal 2,500 Gal 5,000 Gal

Optional: Sediment, Sand and Turbidity Filter. PFT 100 (More Information)

No cartridges needed...has clean-out purge valve. See through housing. \$147.57 Add to Cart

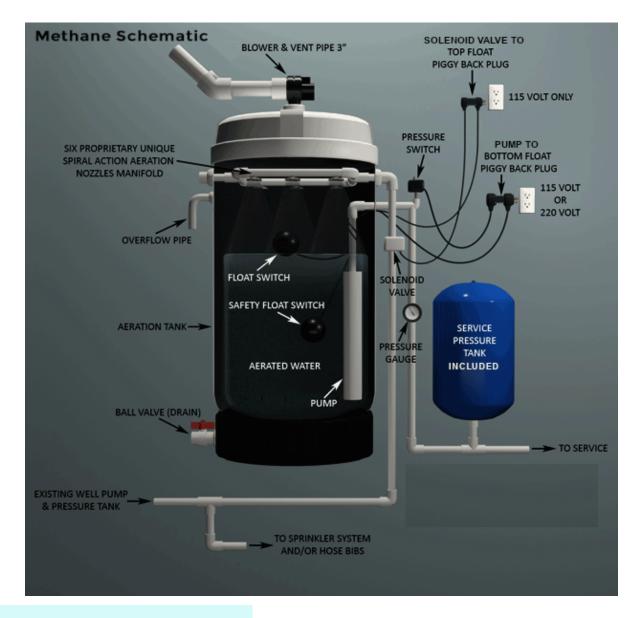

Advanced Aeration Solution




Water Refining Company

Technical Support 1-800-722-3212 (Until 10 pm ET)

- Environmentally Green Technology
- Chemical Free
- FDA Approved (Food & Drug Administration)
- Polyethylene Customized Blow Molded Tank
- Fully Automatic
- Twist Top Accessibility
- 1/2 H.P. Submersible Pump, 115-V or 220-V,
- Bladder Pressure Tank 22 Gal. Flexcon PC66FR
- Exhaust Blower System
- Automatic Refilling and Shut Off Controls Completely
- Assembled and Wired for Installation
- 5 Year Limited Warranty on Aerator Tank
- Installation Instructions Included

Unique Nozzle Technology

METHANE AERATION MANIFOLD

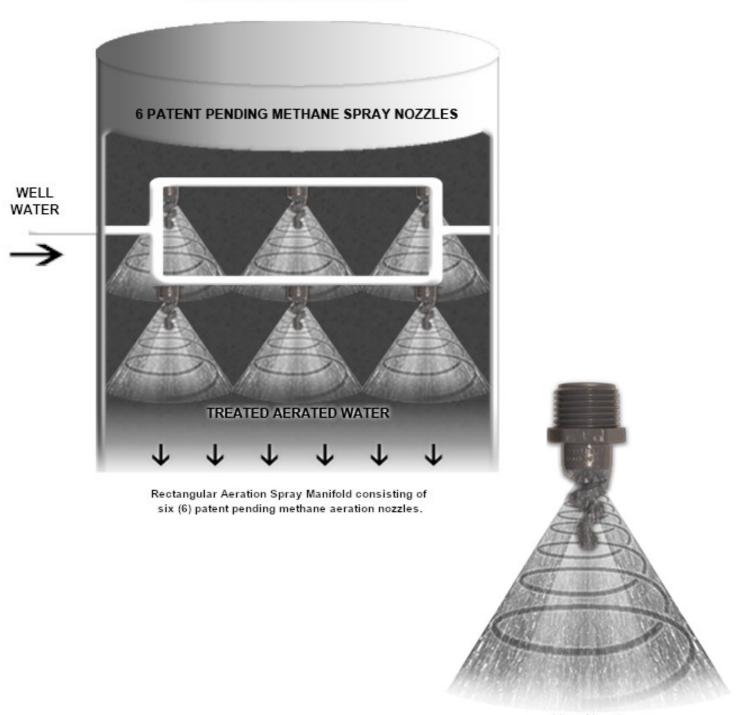

Non-Clogging Double Spiral Spray Nozzle

All Rights Reserved.

Each aeration nozzle produces a spiral double cone of spray, a spiral inner cone of spray within a spiral outer cone of spray. This patent pending spray action doubles the aeration process.

How Does it Work?

Well water enters the Aerator Tank after your existing well pump and pressure tank. The six nozzle Aeration manifold scrubs, oxidizes, and aerates (mixing of air and water), and the Methane Gas is blown out via the Exhaust Blower System through a 3" PVC or similar pipe, and vented outside the home. The Methane Gas escapes into the atmosphere.

Also, installed vertically inside the Aerator
Tank is a submersible pump needed to repressurize the water supplying the home
or building. A companion pressure tank is
included for the Aerator submersible pump.
The System is fully automatic with
automatic refilling and shutoff controls.

- Stops sputtering, water hammer, gurgling, fizzing of water from taps, milky look and swampy odor and taste.
- •No need for a huge storage cistern.
- No need for a high pressure air bubbling aeration pump.
- •No monthly service.

